

Pressure Range

From: 53.00 bar g. (768.50 psi g.)
To: 370.00 bar g. (5365.00 psi g.)



Temperature Range

-196 °C to 70 °C



Flow Area

28.27 mm² (6.00 mm inlet bore diameter)



Connections

Inlet: 3/8" to 3/4" BSP, BSPT, NPT
Outlet: 3/4" BSP



Seal Materials

PTFE

	GP 32931	GP 32938
1 SEAT	ST. STEEL	ST. STEEL
2 BODY	BRASS	ST. STEEL
3 SEALING PLUG	PTFE	PTFE
4 PLUNGER	ST. STEEL	ST. STEEL
5 SPINDLE	ST. STEEL	ST. STEEL
6 SPRING	ST. STEEL	ST. STEEL
7 ADJUSTER	BRASS	ST. STEEL
8 CAP	BRASS	ST. STEEL
9 'O' RING	NITRILE	NITRILE
10 COVER	BRASS	ST. STEEL
11 WIRE & SEAL	ST. STEEL & LEAD	ST. STEEL & LEAD

Notes

- Maximum permissible built up back pressure is 10% of set pressure
- Relieving pressure is set pressure +10%
- Reseating pressure is set pressure -10% (-15% above 240 bar g.)


Approvals

- BS EN ISO 4126-1
- PED 97/23/EC

DN6

Seetru Limited
Albion Dockside Works
Bristol BS1 6UT
England

Tel: +44 (0) 117 927 9204
Fax: +44 (0) 117 929 8193
sales@seetru.co.uk
www.seetru.co.uk

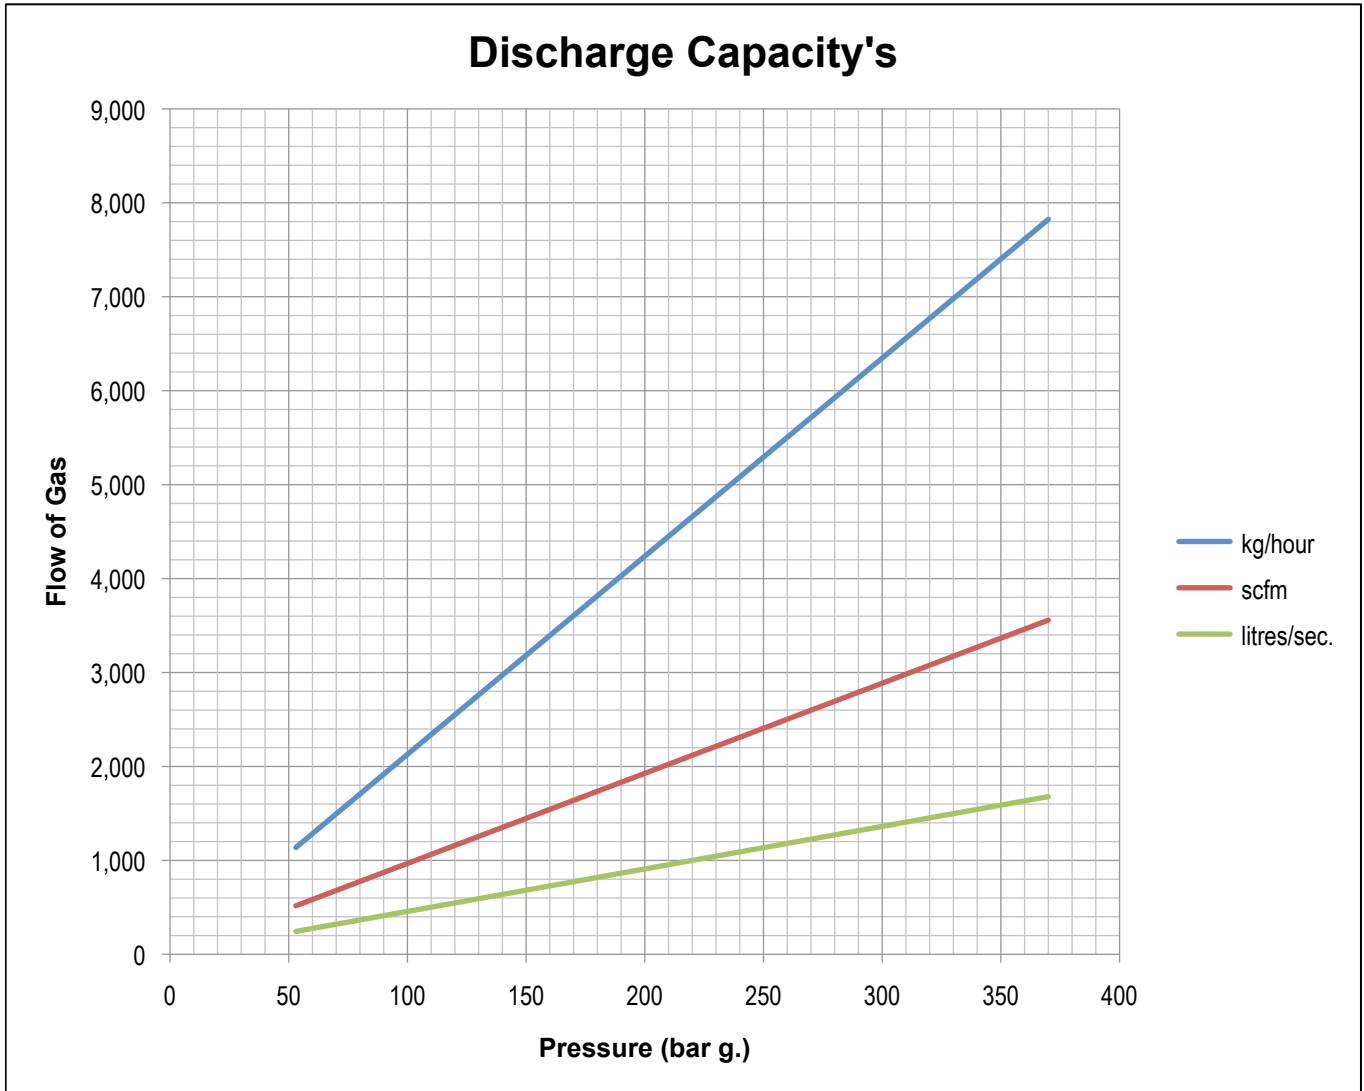

For assistance in sizing a valve to your specifications please contact the Seetru technical sales desk.

DN6

Seetru Limited
Albion Dockside Works
Bristol BS1 6UT
England

Tel: +44 (0) 117 927 9204
Fax: +44 (0) 117 929 8193
sales@seetru.co.uk
www.seetru.co.uk