

### Pressure Range

From: 13.50 bar g. (195.75 psi g.)  
To: 50.00 bar g. (725.00 psi g.)



### Temperature Range

-30 °C to 200 °C (subject to duty)



### Flow Area

78.54 mm<sup>2</sup> (10.00 mm inlet bore diameter)



### Connections

Inlet: 3/8" to 1/2" NPT  
Outlet: 1/2" to 5/8" FLARE



### Seal Materials

Perfluoroelastomer

		RP 319
1	BODY	BRASS CW614N
2	SEAL	PERFLUROELASTOMER
3	PLUNGER	BRASS CW614N
4	SPRING	ST. STEEL 1.4310 (302)
5	ADJUSTER	BRASS CW614N
6	'O' RING	NITRILE
7	ADAPTOR	BRASS CW614N

### Notes

- Relieving pressure is set pressure +10%
- Reseating pressure is set pressure -10%


### Approvals

- TÜV Germany (AD-Merkblatt A2)
- BS EN ISO 4126-1
- ASME Section VIII Division 1
- PED 97/23/EC

# DN10

Seetru Limited  
Albion Dockside Works  
Bristol BS1 6UT  
England

Tel: +44 (0) 117 927 9204  
Fax: +44 (0) 117 929 8193  
sales@seetru.co.uk  
www.seetru.co.uk

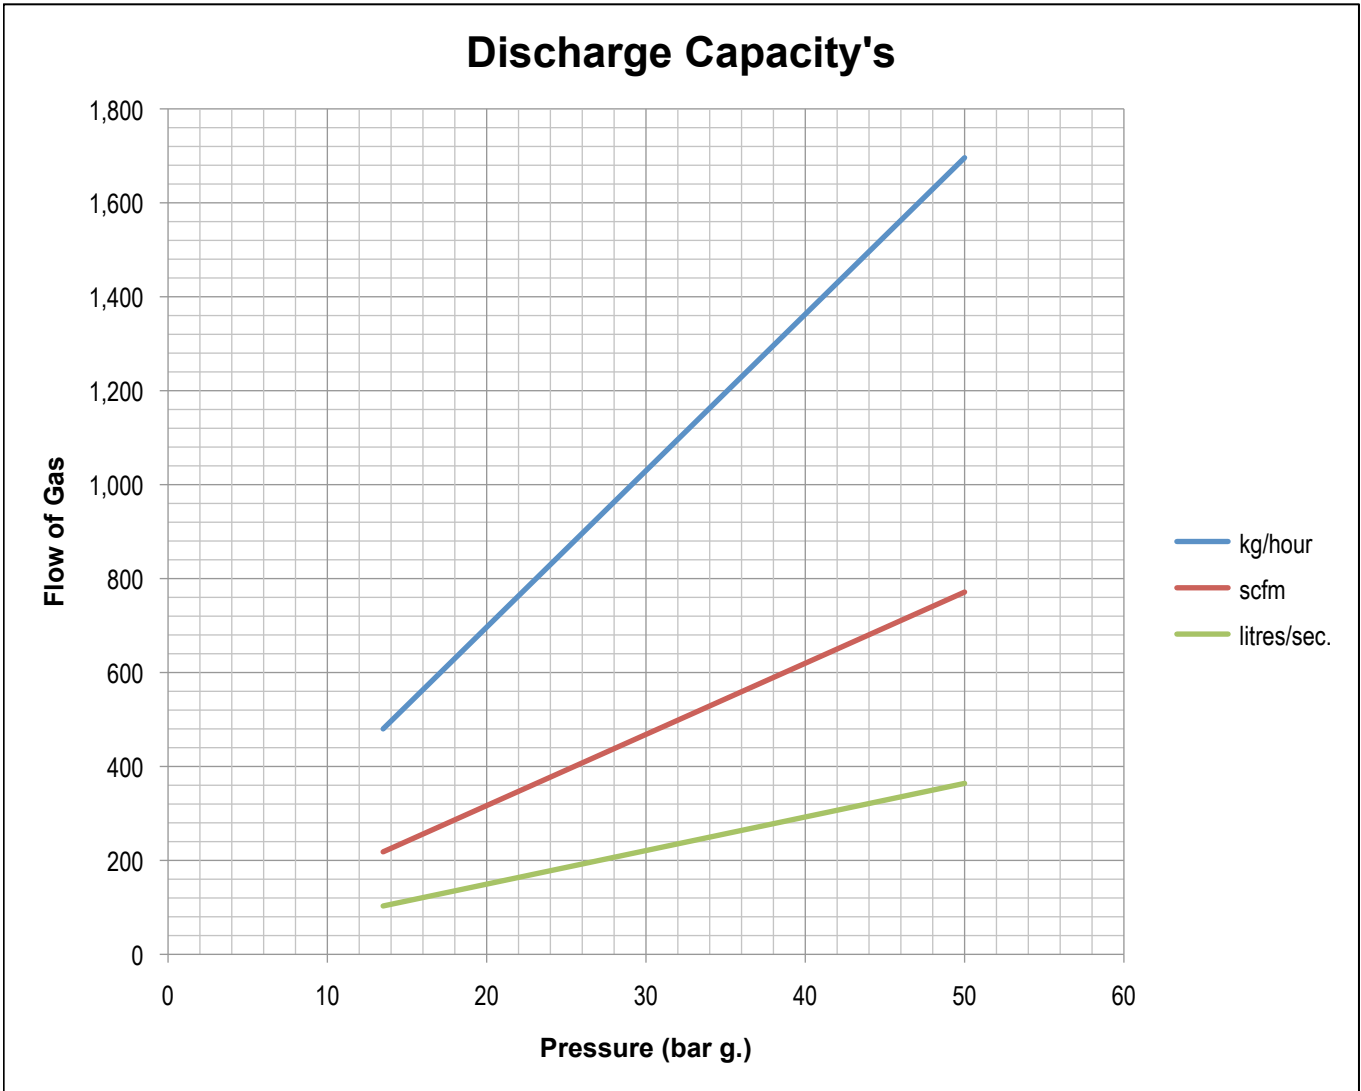

For assistance in sizing a valve to your specifications please contact the Seetru technical sales desk.

**DN10**

Seetru Limited  
Albion Dockside Works  
Bristol BS1 6UT  
England

Tel: +44 (0) 117 927 9204  
Fax: +44 (0) 117 929 8193  
sales@seetru.co.uk  
www.seetru.co.uk