

### Pressure Range

From: 0.27 bar g. (3.92 psi g.)  
To: 5.00 bar g. (72.50 psi g.)



### Temperature Range

Up to: 140 °C



### Flow Area

49.02 mm<sup>2</sup> (7.90 mm inlet bore diameter)



### Connections

Inlet: 1/4" BSP, BSPT  
Outlet:



### Seal Materials

Silicon

		SA 319
1	BODY	BRASS CZ132
2	ADJUSTER	BRASS CZ132
3	PLUNGER	BRASS CZ132
4	NAMEPLATE	ALUMINIUM ALLOY
5	SPRING	ST. STEEL
6	DISC SEAL	SILICONE
7	PULL RING	ST. STEEL
8	LOCKING SLUG	NYLON

### Notes

- Relieving pressure is set pressure +0.3 bar g.
- Reseating pressure is set pressure -0.3 bar g.


### Approvals

- TÜV Germany (AD-Merkblatt A2)
- BS EN ISO 4126-1
- PED 97/23/EC

# DN8

Seetru Limited  
Albion Dockside Works  
Bristol BS1 6UT  
England

Tel: +44 (0) 117 927 9204  
Fax: +44 (0) 117 929 8193  
sales@seetru.co.uk  
www.seetru.co.uk

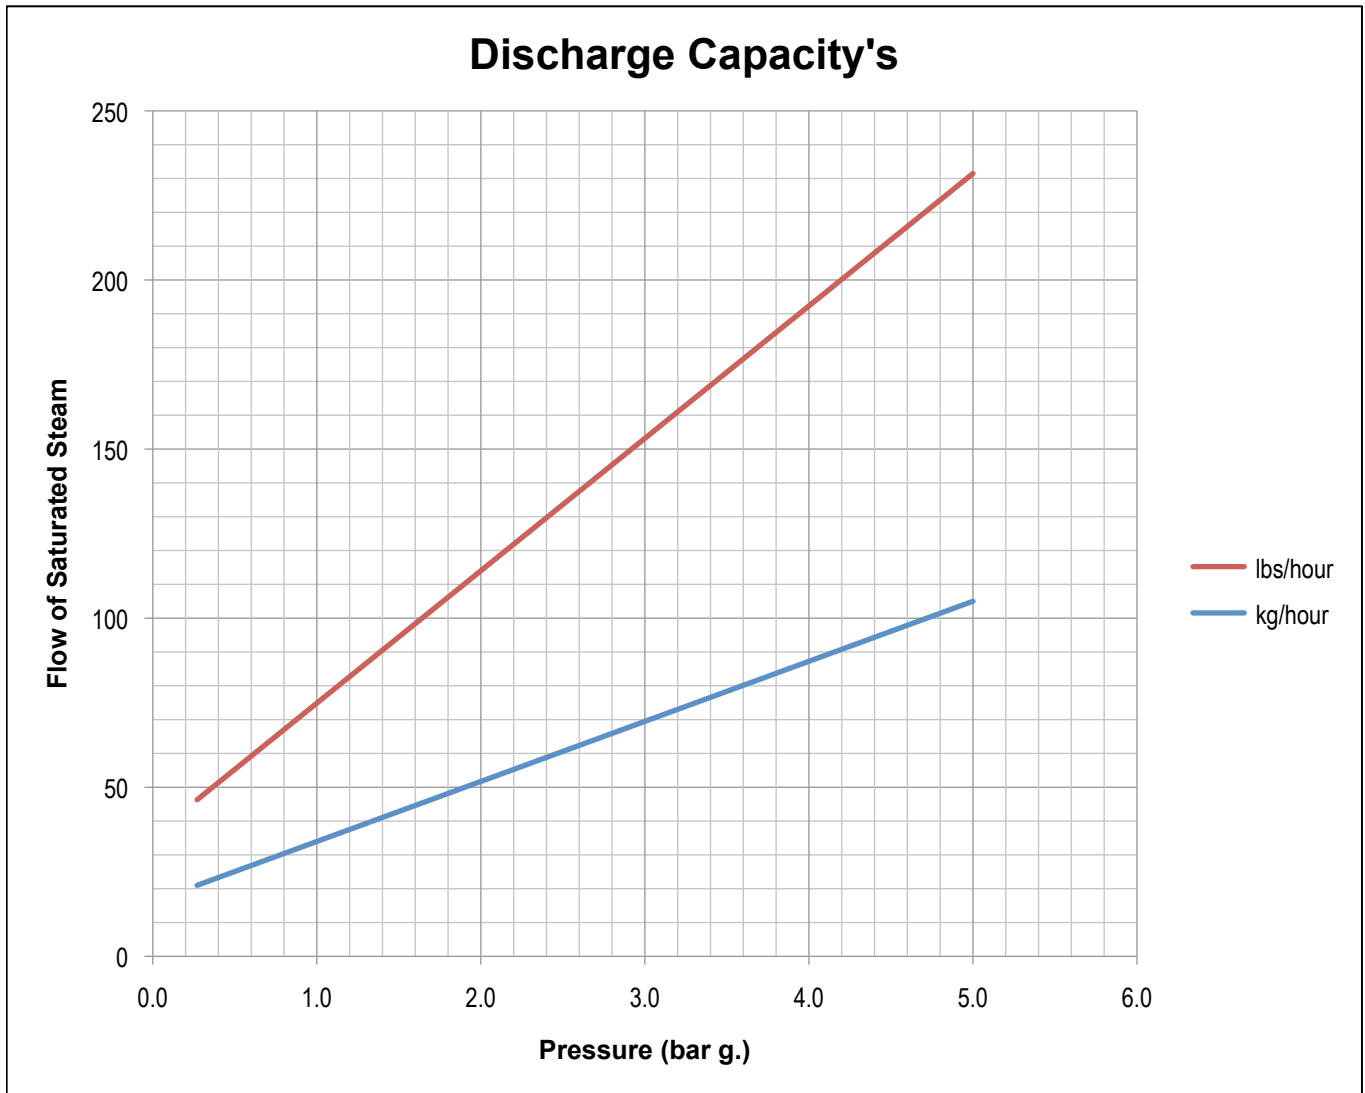

For assistance in sizing a valve to your specifications please contact the Seetru technical sales desk.

# DN8

Seetru Limited  
Albion Dockside Works  
Bristol BS1 6UT  
England

Tel: +44 (0) 117 927 9204  
Fax: +44 (0) 117 929 8193  
sales@seetru.co.uk  
www.seetru.co.uk